


# Eddy Current Signal Converter

Sensor Signal Converter designed for critical turbo machinery applications such as steam, gas and hydro turbines, compressors, pumps and fans to measure radial and axial shaft displacement, position, eccentricity and speed/key.

Dynamic Performance	
Frequency Range (-3 dB)	0 to 20000 Hz
Rise Time	<15 $\mu$ s
NOTE: Designed for PR6422, PR6423, PR6424, PR6425, PR6426 For extended range use: CON021/91x-xxx PR6425 always requires extended range converter	
Environmental	
Operating Temperature Range	-30 to 100°C (-22 to 212°F)
Shock and Vibration	5g @ 60 Hz @ 25°C (77°F)
Protection Class	IP20
Power & Electrical	
Supply Voltage Range	-23V to -32V (Output Range -4V to -20V)
	-21V to -32V (Output Range -2V to -18V)
Physical	
Housing Material	AlMgSi 0.5 F22
Weight	~ 120 grams (4.24 oz)
Mounting	4 Screws M5x20 (Included in Delivery)
Connections (Screw terminal)	(max. 1.5mm <sup>2</sup> , wire-end sleeves)

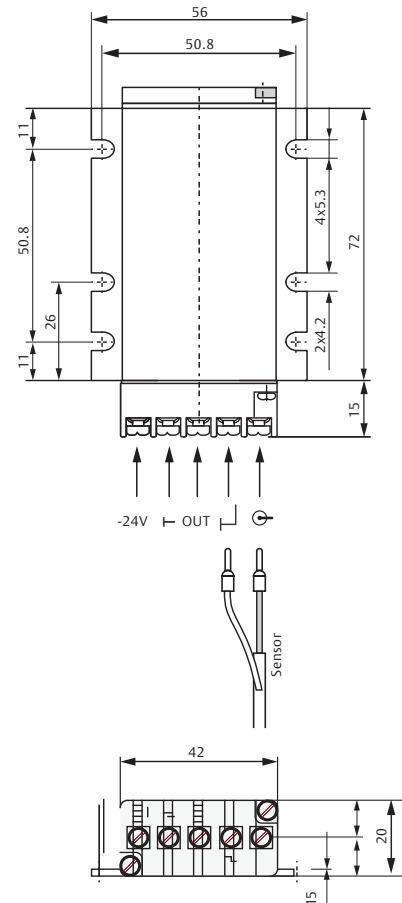

Compliance and Certifications	
CE	2014/30/EU (EN 61326-1) 2014/34/EU 2011/65/EU
ATEX	EN 60079-0 EN 60079-11
IEC-Ex	IEC 60079-0 IEC 60079-11 IEC 60079-26
CSA	CAN/CSA-C22.2 NO. 0-M91 CAN/CSA-C22.2 NO. 157-92 CAN/CSA-C22.2 NO. 213-M1987 CAN/CSA-E60079-15-02 (R2006) CAN/CSA-C22.2 NO. 25-1966 CAN/CSA-C22.2 NO. 61010-1-04 ANSI/UL Standard 913-2004 ANSI/UL Standard 1604-1995 UL 60079-15 2002 UL 61010-1

## Hazardous Area Approvals

Intrinsic Safety (iA)	
ATEX	II 2 G Ex ia IIC T4 Gb, -20°C ≤ Ta ≤ 80°C (Use with current limiting, e.g.: safety barrier)
IEC-Ex	Ex ia IIC T4 Gb, -20°C ≤ Ta ≤ 80°C (Use with current limiting, e.g.: safety barrier)
CSA	Class I Division 1, Groups A, B, C, D, T4 T4: -25°C ≤ Ta ≤ 80°C (Use with current limiting, e.g.: safety barrier)
Non-sparking (nA)	
CSA	Class I Division 2, Groups A, B, C, D Ex nA II T3..T4 AEx nA II T3..T4 T4: -25°C ≤ Ta ≤ 80°C

## Ordering Information

Model Number	Sensor Type	Measuring Range	Linearity Error
CON031	PR6422	1.0mm (Standard Range)	≤ 1.5%
	PR6423	2.0mm (Standard Range)	≤ 1.0%
	PR6424	4.0mm (Standard Range)	≤ 1.5%
	PR6426	8.0mm (Standard Range)	≤ 1.5%
CON031/912-015	PR6422	1.5mm (Extended Range)	≤ 2.0%
CON031/913-030	PR6423	3.0mm (Extended Range)	≤ 1.5%
CON031/913-040	PR6423	4.0mm (Extended Range)	≤ 2.0%
CON031/914-060	PR6424	6.0mm (Extended Range)	≤ 1.0%
CON031/914-080	PR6424	8.0mm (Extended Range)	≤ 1.5%
CON031/914-100	PR6424	10.0mm (Extended Range)	≤ 2.0%
CON031/915-040	PR6425	4.0mm (Standard Range)	≤ 1.5%
CON031/915-060	PR6425	6.0mm (Extended Range)	≤ 2.0%
CON031/915-080	PR6425	8.0mm (Extended Range)	≤ 3.0%
CON031/915-100	PR6425	10.0mm (Extended Range)	≤ 4.0%
CON031/916-120	PR6426	12.0mm (Extended Range)	≤ 1.5%
CON031/916-160	PR6426	16.0mm (Extended Range)	≤ 2.0%
CON031/916-200	PR6426	20.0mm (Extended Range)	≤ 2.5%
CON031/916-240	PR6426	24.0mm (Extended Range)	≤ 3.5%

©2023, Emerson. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. The AMS logo is a mark of one of the Emerson family of companies. All other marks are the property of their respective owners.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

### Contact Us

[www.emerson.com/contactus](http://www.emerson.com/contactus)